



Sunset Oak AVE95SUNO



Rodeo Oak AVE95RODO



Ocean Drive Oak AVE95OCEO



Mulholland Oak AVE95MULO



Wilshire Oak AVE95WILO



Michigan Hickory AVE95MICH



Belle Meade Hickory AVE95BELH



Newbury Hickory AVE95NEWH



Pennsylvania Maple AVE95PENM



Lombard Maple AVE95LOMM



Wilshire Oak

Features

Dimensions:	9.5" x 7'2" RL
Thickness:	5/8" Engineered TrueCore Centerply 4mm Sawn Cut Face
Finish:	TrueMark GlazeTek®
Edge Detail:	Handcrafted Micro Bevel
Surface Texture:	Wire Brushed (Hickory & Oak) and Lightly Handscraped (Maple)
Certified:	EPA - TSCA Title VI Compliant 3rd Party Certified - Responsibly Harvested
TrueCore:	Third Party Certified veneer
Warranty:	Limited Lifetime residential finish Limited Lifetime residential structural 5 year commercial finish 10 year commercial structural
Maintenance:	APPROVED CLEANERS: WOCA Hardwood, LVT, Tile & Laminate Floor Cleaner, Bona® Pro Series Hardwood Floor Cleaner, OR LOBA® Universal Floor Cleaner

Benefits

Finish:	12 coats of Aluminum Oxide hand glazed satin finish Superior color depth and durability 100% renewable without sanding via a Screen & Recoat
4mm Wear Layer:	Ultra thick wear layer provides lasting durability Same wear layer as 3/4 solid wood floors Easier to repair or touch up if an accident occurs
Structure:	75% Greater dimensional stability than 3/4" solid Healthy indoor air quality - Third party certified TrueCore centerply for maximum stability




Rodeo Oak

Trim Options

Stair Nose
T-molding
Threshold
Reducer

Installation

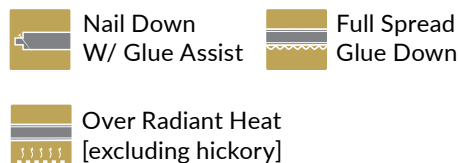

Installs over: concrete, wood, vinyl floors and radiant heat systems. Above, on or below grade.

Fumed Characteristics

What to Expect with Fumed Floors



1. Regional Variation
2. Batch Variation
3. Plank Variation

All oak colors in the Avenue Collection are fumed.

Fuming simply deepens the natural colors and highlights the contrast of the wood planks without using stain to cover them. Our process creates a naturally richer, darker, clearer floor with a higher contrast of colors from board to board.

What is Fumed Hardwood?

This is a natural accelerated aging process used to enhance the dark to light shades within every wood plank, batch & region. The deepening in color and variation is created by adding a natural oxidizing agent in a controlled environment to react with the naturally present tannins in the wood - Time, Temperature & Tannins (naturally present in the wood) mix to create one of a kind planks that we add to our Collections. While a very controlled environment and process, it is not 100% precise, every region, grove and tree produces individually unique high contrast color palette.

Learn more about the beauty of fuming,
www.hallmarkfloors.com/the-beauty-of-fumed-hardwood-floors/

Light Characteristics

Wood Floor Plank with Natural Finish
Light* Exposure Over 48 Months



Wood Characteristics

Color, Graining & Natural Changes



Wood flooring is a natural product that will feature distinct color and graining between planks. Each board contains large to small knots, sap wood, and a high contrast within the natural and lighter stained visuals. Knots and voids may or may not be filled with dark putty.

Note: This sample may not be representative of your entire installed floor, for your reference and the latest updated information, please refer to hallmarkfloors.com to see our online room scenes and product galleries.

Before installation review the samples with the floor and verify our beautiful one of a kind floor is what you are expecting.

Installation constitutes acceptance.



TrueMark
Glaze Tek Poly Finish



COMMERCIALLY RATED HARDWOOD FLOORING

ASTM

Commercial Moderate:	EN 31 – Bedrooms, Hotels, Conference Rooms Small Offices
Commercial General:	EN 32 – Classrooms, Small Offices, Hotels Boutiques
Flexibility (ASTM F137):	Pass
Thickness Standard (ASTM F386)	Pass
Resistance to Chemicals (5 minute standard) (ASTM F925 5):	Pass
Resistance to Chemicals (24 hour standard) (ASTM F925):	Pass
Stain Resistance (ASTM F925):	Pass
Heat Stability by Color Change (ASTM F1514):	Pass
Light Stability by Color Change (ASTM F1515):	Pass
Short Term Indentation (ASTM F1914):	Pass
Dimensional Stability after exposure to heat (ASTM F2199):	Pass
Fire Resistance (ASTM E648):	Class C – Pass
Coefficient of Friction (ASTM D-2047-04):	Pass
Smoke Density (ASTM E662-09):	Pass
Static Load (ASTM F970-07):	Pass
Wear Resistance High (ASTM: F510-93)	Pass
Emission (air) (ASTM F510-93):	None Detected